



## Asset Gateway - AG24

## **EUROPEAN DRY TRAILER INSTALL GUIDE**

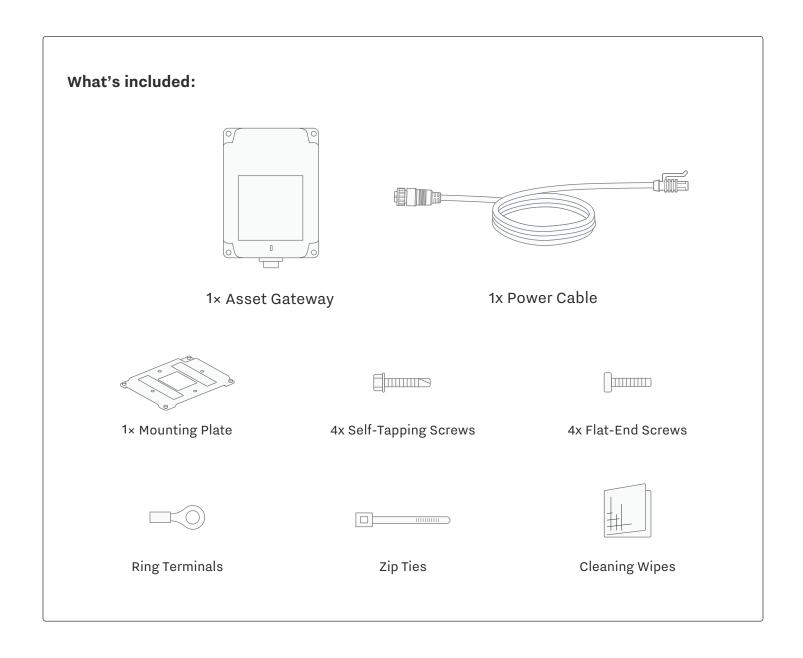




Select desired mounting location and clean thoroughly with cleaning wipe.


Mount with sun exposure for best solar charging.






Mount AG onto mounting plate with 4 flat-end screws (Bag 2).






Run cable to power source. Fasten to trailer with zip ties.

2




Attach mounting plate with adhesive. Secure with 4 self-tapping screws (Bag 1) if desired.





Plug cable into AG.





Connect cable to AUX power port if available.

Otherwise remove the connector and hard wire to power (red is the power line, and black is the ground). AG light turns on for 30 seconds if correct.

AG will operate in real time when power is supplied. When power is not available, AG will run off of internal battery in power-save mode (periodic check-ins, not real time).