




samsara

ACC-SC-MNT-A1

Camera Arm Mount Installation Guide

For more information please visit the Connected Sites Knowledge Base
at samsara.com/support.

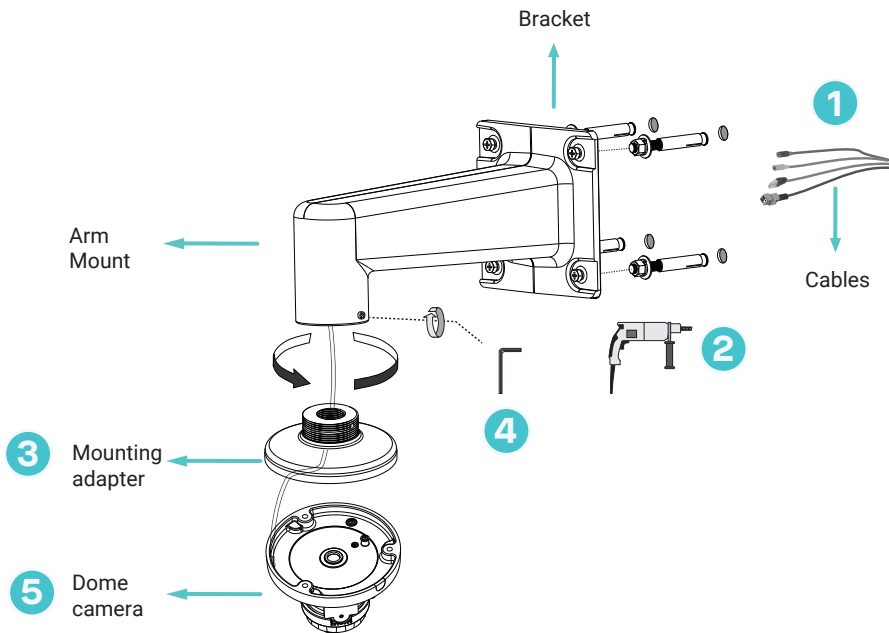

Instructions:

*Note: the ACC-SC-MNT-A1 Arm Mount is only compatible with the SC11 Dome Camera.

1. Route the ethernet and other cables through the wall, the bracket, and the arm mount.
2. Once the cables are run through, locate the position on the wall where you want to install the arm mount and the camera. Drill holes into the wall to secure the bracket to the wall and fasten the screws. The holes should be 10mm in diameter and 60mm deep.
3. Attach the mounting adapter to the arm mount by rotating it clockwise until tightly fastened.
4. Use a hex wrench to secure the mounting adapter to the arm mount.
5. Connect the cabling to the dome camera, attach to the mounting adapter, and resecure the dome camera lid.